



DIA-250S

Integrated Amplifier/DAC

User Manual

Contents

Don't be a stranger	3
Package contents	3
Safety first!	4
About the amplifier	5
General design	5
Class-D Output Stage	5
Analogue Input Stage	5
D/A Converter	5
USB Versatility	5
Connectivity	5
LED Display	5
Setting up your amplifier	6
Basic connection	6
Overview	6
Connecting to a Bluetooth device	7
Connecting a computer to USB	7
Connecting an Apple iPad to USB	7
Connecting an Apple iPhone to USB	7
Connecting NPM to the network	7
Connecting an active subwoofer	7
How does it work?	8
Power on	8
Standby	8
Adjusting the volume	8
Muting	8
Input selection	8
Display dimming	8
Sample rate read-out	8
Direct	9
Connecting a headphone amp and turning the speaker outputs on/off	9
Protection warnings	9
RC-5 remote control	10
How to insert/replace the battery	10
Functions	10
Installing USB Driver	11
Requirements	11
Windows PC Installation and Set-Up	11
Mac Installation and Set-Up	12
USB audio troubleshooting	13
Make it last!	14
If all else fails...	14
Technical specifications	15



Don't be a stranger

Thank you for purchasing the Gato Audio DIA-250S. We are absolutely confident that it will bring you many hours of listening pleasure.

We hereby cordially invite you to join the Gato Audio family by registering your product online. You may also consider signing up for our newsletter to receive information about exciting new products, events and technical updates. We are also present on several social media like Facebook, Twitter, Instagram and LinkedIn.

All this and more on www.gato-audio.com

Our very best,

Gato Audio

Package contents

Please check that the following is included in the package:

DIA-250S:

- 1 Gato Audio DIA-250S integrated amplifier
- 1 Mains cable
- 1 Gato Audio RC-5 remote control
- 1 CR2032 3 V battery
- 1 Bluetooth antenna
- This manual 😊

DIA-250S NPM:

- 1 Gato Audio DIA-250S NPM integrated amplifier
- 1 Mains cable
- 1 Gato Audio RC-5 remote control
- 1 CR2032 3 V battery
- 2 Antennas
- 1 USB Wi-Fi dongle
- NPM Quick Start Guide
- This manual 😊

Safety first!

Mains plug and cable:

- Only use mains cables that adheres to safety standards - like the one included with this amplifier
- Insert the mains plug fully into the mains outlet socket
- Do not defeat the ground connection
- Do not move the amplifier around while it is connected to mains
- Do not place heavy objects on the mains cable or place the cable near high-temperature objects
- Do not use damaged mains plugs or socket outlets

Liquids:

Electricity and liquids are not a safe combination, therefore:

- When cleaning the amplifier, remove the mains plug
- Do not handle the mains plug with wet hands
- Do not spray any liquid directly onto the amplifier
- Do not place liquid containers above or near the amplifier
- Keep liquids away from the amplifier

...And:

- This is not a toy and should not be handled like one (by children OR adults)
- Do not remove the covers of the amplifier (for service see page 14)
- Do not attempt to put foreign objects inside the amplifier (for service see page 14)
- Do not cover the amplifier with cloth
- Do not place the amplifier on sloped or unstable surfaces
- When the amplifier will not be used for a long time, remove the mains plug
- Never connect or disconnect cables when the amplifier is switched on
- Do not short the amplifier outputs
- This unit is made for indoor temperature (15-25° C or 59-77 °F). If it has been exposed to cold temperature, let it adjust itself to indoor temperature before use
- Make sure that your amplifier is able to breathe by securing a minimum safe distance around the heat sinks of 100 mm or 4 inches
- The amplifier can get hot during use. Normal operating temperature is from room temperature to 50° C or 122° F





About the amplifier

General design

The Gato Audio DIA-250S Class-D integrated amplifier are designed and built to a vision of combining technology, power, sonic performance, connectivity, versatility, stunning looks and compact design. The amplifier features built-in D/A converters with electrical, optical, USB and aptX Bluetooth inputs. High quality analogue input is via RCA connectors or via XLR connectors for true balanced signals. Both balanced and unbalanced line outputs are provided. The DIA-250S offers 250 watts per channel into 8 ohm loads and doubles its power output into 4 ohm loads. Modern Class-D technology enables extremely high efficiency, thereby providing both enormous power and huge voltage swing. Besides the obvious benefit of having this much power, the huge voltage swing from these powerhouses gives effortless dynamic headroom without clipping, all in the service of bringing you stunning musical performance.

Class-D Output Stage

The DIA-250S amplifier offers state of the art Class-D output stages with dedicated and optimized switch mode power supplies. The multiple stage power amplifier is built around proven technology from International Rectifier, optimized with a precision high frequency oscillator and PWM modulator. A pair of precision switching MOS-FET transistors, with super low on-resistance ensures the high frequency switching is done perfectly and with as little loss as possible. The output filters are made from quality PP capacitors and low DCR coils, converting the high power PWM signals back into detailed and smooth analogue music.

Analogue Input Stage

The analogue input stage is where everything begins. It not only connects external inputs and the built-in D/A converter with the output stage, it adapts impedances, adjusts levels and switches signals. A super-gentle embrace of the delicate analogue signals is important for the total performance of the amplifier. At Gato Audio we have utilized our many years of experience in “voicing” analogue amplifiers to make this particular stage perform at its very best. We tuned the input stage to perform with a natural and lifelike sound, affecting the original signal as little as possible.

D/A Converter

The built-in D/A converter offers real high end performance, enabled by the use of a dedicated power supply, a balanced-driven Burr-Brown PCM1794 D/A converter, an optimized high bandwidth I/V converter, and an analogue stage with low-Q, low pass filters. All digital inputs are upsampled to 24bit/192kHz. This D/A converter will upgrade any digital source - such as wired or wireless streaming from your computer or CD drive - to a high end level of detail and musical performance.

USB Versatility

The true 24bit/192kHz digital input via the state of the art asynchronous USB circuit is especially worth highlighting. It enables the possibility of a sonic performance vastly above that of any CD. It is the key note of making these amplifiers a quality-enhancing connection point for your Mac, PC or even your iPhone and iPad.

Connectivity

We had our eye on versatility and connectivity when designing the DIA-250S. The amplifier offers not only a wide range of digital and analogue inputs, but also line outputs, a trigger signal for external power amplifiers, and a configurable home theater input. The HT input can turn the amplifier into a fixed level power amplifier for use in a surround setup, without compromising the sonic performance.

LED Display

By choosing a large high contrast white LED dot matrix display, we gave the DIA-250S a distinct appearance, easy to understand, easy to see and operate – even at remote control distance. In addition to displaying output level and selected input, it also displays the sample rate of the digital input – revealing the quality. The LED display is fully dimmable by the remote control.



Setting up your amplifier

Basic connection

Follow these steps for setting up your system in this sequence:

1. Place the DIA-250S as per the instructions on page 4
2. Connect inputs to the amplifier
3. Connect your loudspeakers to the amplifier
4. Connect mains power cable to the amplifier and turn it on
5. Select input and volume setting. Enjoy!

Overview

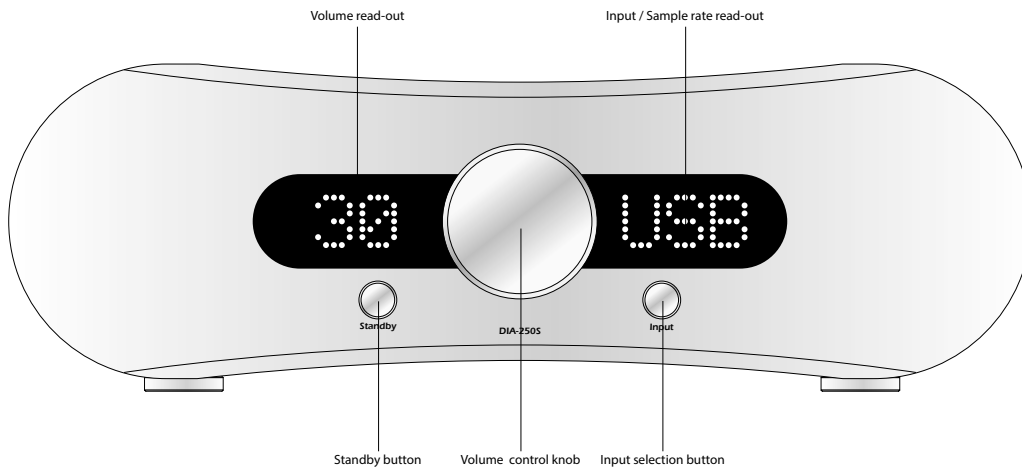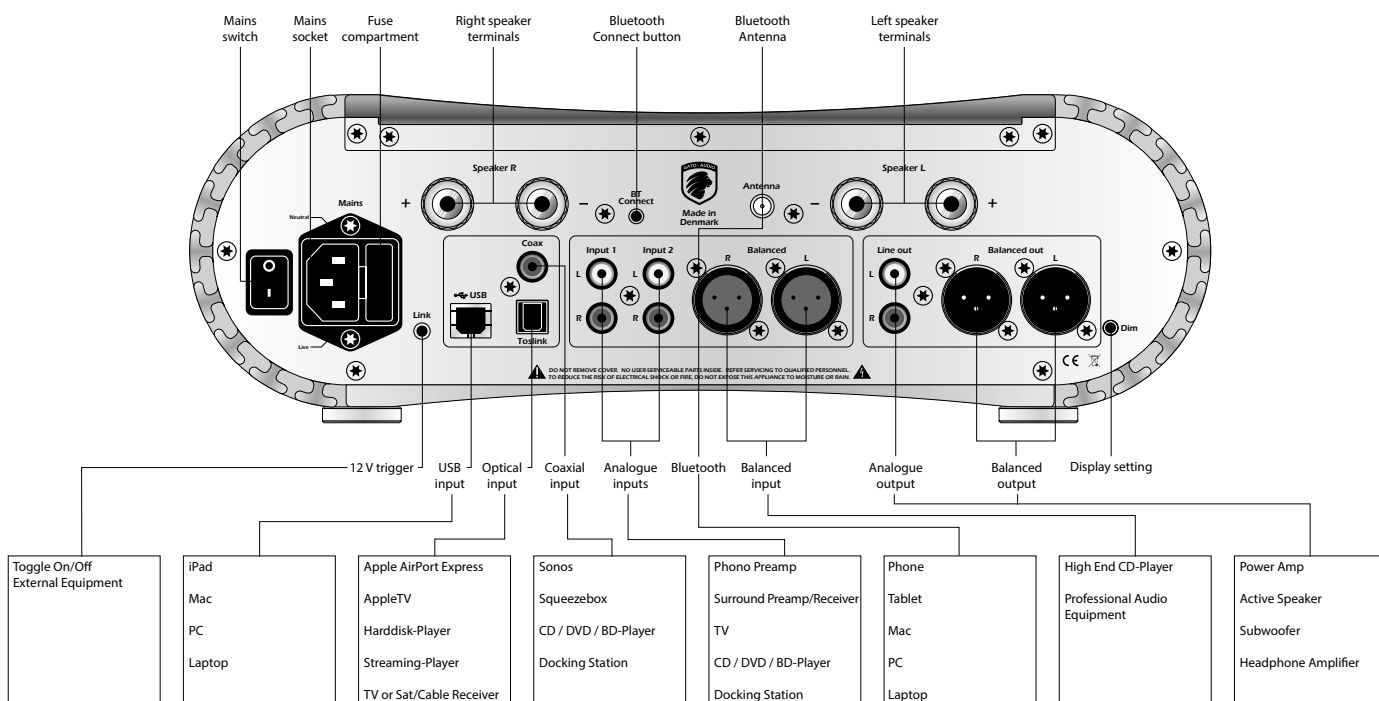



Connecting to a Bluetooth device

Before connecting the DIA-250S to a Bluetooth device (your phone, tablet or computer), you need to screw in the antenna to the back of the amplifier where it says "BT antenna", as per the drawing on the previous page. To hear music from Bluetooth choose the BT input on your amplifier.

Initial Connection

For initial connection press the "BT connect" button on the back of the amplifier once. Then go to the settings of the Bluetooth device (your phone or tablet) and connect to "Gato Audio DIA-250S".

Disable Bluetooth

To disable Bluetooth on the DIA-250S press and hold the "BT connect" button on the back of the amplifier for 2-5 seconds. All connected Bluetooth devices should now be disconnected. To Enable Bluetooth again press and hold the "BT connect" button 2-5 seconds. All previously connected devices should automatically reconnect if they have Bluetooth enabled.

Reconnect

If you stopped the Bluetooth function on your phone or tablet, you will need to reconnect. Go to the settings of the Bluetooth device (your phone or tablet) and connect to "Gato Audio DIA-250S". Alternatively enable Bluetooth on your phone or tablet, then turn off your amplifier and turn it back on. The Bluetooth device should automatically reconnect.

Multiple Connections

The DIA-250S Bluetooth supports multiple devices to be connected at the same time. While a device is connected, press the "BT connect" button on the back of the amplifier once. Then go to the settings of the new Bluetooth device (your phone or tablet) and connect to "Gato Audio DIA-250S". The first device has priority over the following devices.

The DIA-250S Bluetooth stores up to 10 devices that have been connected. When it has stored 10 devices it will automatically make room for new by deleting the oldest device first.

Connecting a computer to USB

Before connecting the DIA-250S to your computer via USB, please read the installation instructions on page 11.

Connecting an Apple iPad to USB

It is possible to stream music from an iPad to the USB port of the DIA-250S. An Apple Camera Connection Kit is required for this feature. The kit is available from the Apple online store or other Apple accessory shops.

Plug the camera connector into the iPad dock connector and connect it to the DIA-250S with a USB cable. Simply start your music app and enjoy the music.

Connecting an Apple iPhone to USB

Like the Apple iPad it is possible to stream music from an iPhone to the USB port of the DIA-250S. The procedure is exactly the same as for the iPad, however it is only possible for iPhones with IOS 7 and later.

Connecting NPM to the network

If you own a DIA-250S with a Network Player Module installed, please refer to the supplied NPM Quick Start Guide or find the full NPM manual online at www.gato-audio.com/downloads.

Connecting an active subwoofer

CAUTION! – This amplifier is not suitable for connection to an active subwoofer via the speaker outputs and the high level input of the subwoofer. Due to the Class-D amplifier construction, left and right ground may not be connected together and therefore we always recommend connecting to an active subwoofer via the line outputs, RCA or balanced connectors – not the speaker outputs.


Please refer to the manual of your active subwoofer and contact the manufacturer's customer service for more detailed information of how to make connection. Gato Audio cannot be held responsible for any damage or failure to either of any involved equipment due to connection an active subwoofer via the speaker outputs of the amplifier.


How does it work?

Power on

Use the mains switch on the back of the amplifier to turn it on. The amplifier is now in standby mode. Only the microprocessor and the standby LED are powered during standby. Therefore, the DIA-250S has an ultra-low standby power consumption of less than 1W.

Standby

Activate the amplifier by pressing  on the remote control or the Standby button on the front panel. When the amplifier enters standby mode again it will remember the selected input channel and volume level. If the volume level is higher than 50, it will be reduced to 50 when the amplifier exits standby mode.

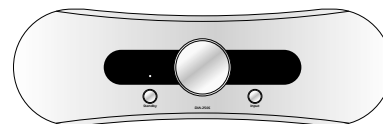


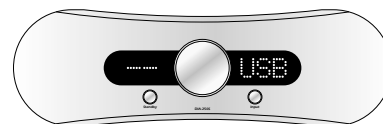
Standby

Adjusting the volume

Turning the volume control knob clockwise increases the volume. Turn it counter-clockwise to decrease the volume. The volume can also be adjusted by pressing the **+** or **-** button on the remote control.



Muting

For complete silence simply press the  button on the remote control. Press the mute button once more to return to the previous volume level.



Mute


Input selection

Use the Input button on the front panel to select between the different input channels. Inputs can also be selected with the remote by pressing the direct input selection buttons or the  or  buttons. The input will switch the channels in this order:

→IN1→IN2→BAL→USB→RCA→OPT→BT→(NET)→

Display dimming

The display can be dimmed by a pressing the Display button on the remote control or the Dim/Display button on the back of the amplifier. The display is now turned off except for two LEDs indicating the dimmed display state. Whenever a change is made to the settings of the amplifier, such as adjusting volume or changing input, the display will light up for 4 seconds, showing the change that is being made. Press either of the buttons again to exit display dimming mode.

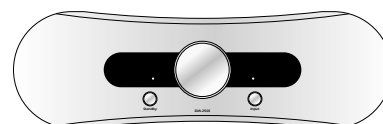


Display dim

Sample rate read-out


The DIA-250S can read and display the sample rate of the USB, RCA, OPT, BT and NET digital input channels. The DIA-250S can be set to display this in two different ways:

1. The display on the right shows the selected input channel, eg. USB. Press the USB button on the remote control, and the sample rate will be shown in kHz instead of selected input channel name for 4 seconds.
2. The display on the right only shows the sample rate. When changing input channels the channel name will be shown for 4 seconds, and then return to display the sample rate.


To switch between the two read-out modes, press and hold the Dim/Display button on the back of the amplifier for 2 seconds.

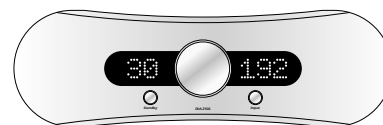

Sample rate read-out

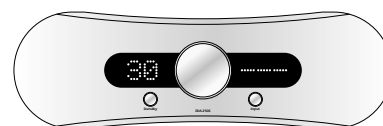

No sample rate available

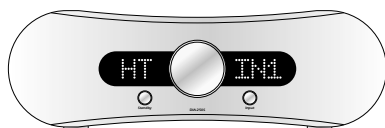

Home Theater direct

Direct

The Direct function bypasses the volume control turning this amplifier into a fixed level power amplifier. This can be very useful in surround setups. To activate this mode, select input IN1 and press and hold the Input button on the front panel of the amplifier for 4 seconds. The left display will read HT.

To disable the function, press and hold the Input button on the front panel of the amplifier for 4 seconds. The amplifier remembers this setting in standby mode and when the DIA-250S is switched off.




Speaker outputs OFF

Connecting a headphone amp and turning the speaker outputs on/off

A headphone amplifier can be connected to the DIA-250S via Line out or Balanced out (see page 6). In this case the speaker outputs can be turned off leaving the signal only to be send through Line out and Balanced out.

When the amplifier is on, press and hold the Standby button on the front panel for 4 seconds until the display reads SP OFF. To turn the speaker outputs on again, press and hold the Standby button on the front panel for 4 seconds until the display reads SP ON.

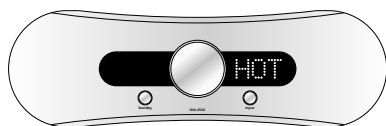

HOT warning

Protection warnings

The DIA-250S is equipped with a sophisticated protection circuit to protect the amplifier and/or the connected equipment in case of failure. The DIA-250S features two warning signals:

A **HOT** sign will blink in the right display due to temperature problems:

If this happens, turn off the amplifier mains switch and wait about 10 minutes for the heat sinks cool down before turning on the mains again. If a lot of heat is generated within a short period of time, please check the following:

- The ventilation around the amplifier
- The speaker cable and cable connections
- The specifications of the connected loudspeakers

An **OFF** sign will blink in the right display:

Turn off the amplifier mains switch and please check the following before turning the mains on again:

- The speaker cable and cable connections
- The connected equipment
- That you are not playing above the clipping area of the amplifier

If the amplifier keeps blinking after the powering up routine, please turn off the amplifier and contact your dealer or Gato Audio.



OFF warning

RC-5 remote control
















The RC-5 is an infrared remote control for the Gato Audio DIA-250S.

How to insert/replace the battery

The RC-5 runs on a standard CR2032 3 V button battery.

1. Remove the small lid on the bottom side of the remote
2. Insert or replace the CR2032 3 V button battery
3. Reinstall the small lid on the bottom side of the remote

Functions

- Standby**  - Press the button to put the amplifier in standby
Press it again to turn it on
- Display**  - Press the button to dim the display
Press it again to restore the display to normal
- Mute**  - Press the button to mute the amplifier
Press it again to return to the previous volume level
- USB**  - Press the button to select the digital USB input channel
- RCA**  - Press the button to select the digital coaxial input channel
- Optical**  - Press the button to select the digital optical input channel
- Input 1**  - Press the button to select the analogue Input 1 channel
- Input 2**  - Press the button to select the analogue Input 2 channel
- Balanced**  - Press the button to select the analogue balanced input channel
- BT**  - Press the button to select the digital Bluetooth input channel
- Net**  - Press the button to select the input channel for the NPM module (optional)
- Volume up**  - Press the button to increase the volume
- Volume down**  - Press the button to decrease the volume
- Next input channel**  - Press the button to select next input channel
- Previous input channel**  - Press the button to select previous input channel



Installing USB Driver

Requirements

Minimum computer configuration required for USB audio streaming:

- Intel Core 2 @ 1.6 GHz, or AMD equivalent with 1 GB RAM
- USB 2.0 interface
- One of the following operating systems:
 - Windows XP with SP3 (32 bit)
 - Windows Vista with SP2 (32 bit & 64 bit)
 - Windows 7, 8 and 10 (32 bit & 64 bit)
 - Apple OS X 10.6.4 (Snow Leopard) or higher

Because there are so many PC configurations out there, we cannot guarantee that you will be able to stream audio on USB even if your system meets the requirements above.

Windows PC Installation and Set-Up


Before you are able to stream audio from USB on your Windows PC the first time, you will have to install the Gato Audio USB driver. You can find the latest driver online at www.gato-audio.com/downloads.

Unzip the driver and then connect your DIA-250S to a free USB port on your computer and start setup.exe:

Click **Next** to start installation



Choose your preferred destination for the installation and click **Install**

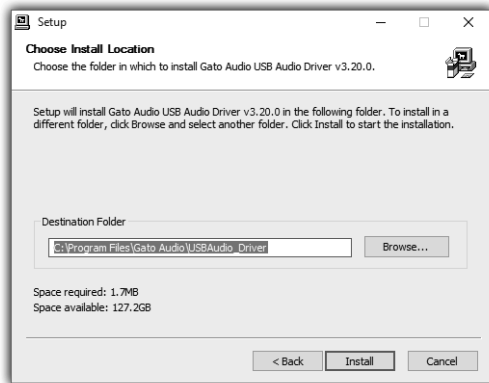


Click **Finish** to complete the installation



During the installation process on Windows XP, you may see this message. Please just click **Continue anyway**




After the installation, follow these steps to setup Windows to stream to your Gato Audio device:




Click **Start** ⇒ open **Control panel** ⇒ Select **Hardware & sound** ⇒ click on **Sound**

Select **Gato Audio DIA-250** as playback device and click **Set Default**

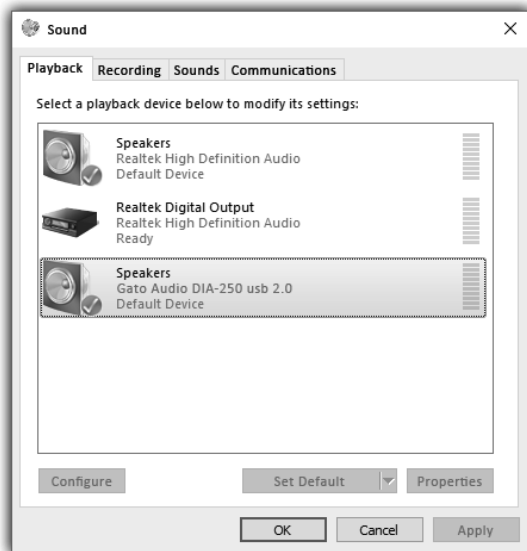

To adjust output format, click **Properties** and select the **Advanced** tab

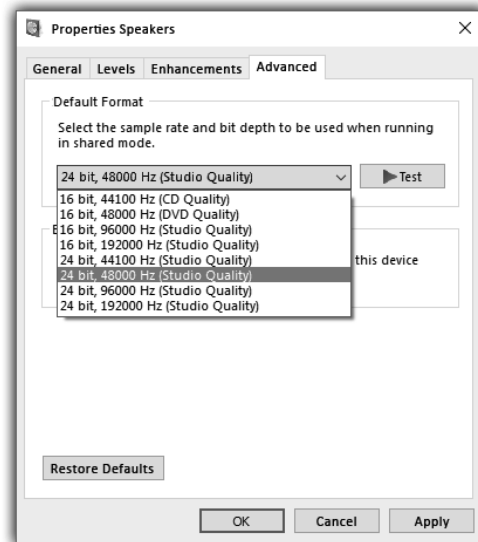

Mac Installation and Set-Up


No driver installation is needed on the Mac. The driver will be installed automatically when the DIA-250S is connected to your Mac for the first time.

To set up your Mac to stream audio to the DIA-250S:



Open **Finder** ⇒ Choose **Utilities** ⇒ Open **Audio MIDI setup**

In Audio MIDI setup select the **Gato Audio USB 2.0** device and then choose **Use this device for sound output**. Set your preferred sample rate and bit resolution at **Format**.

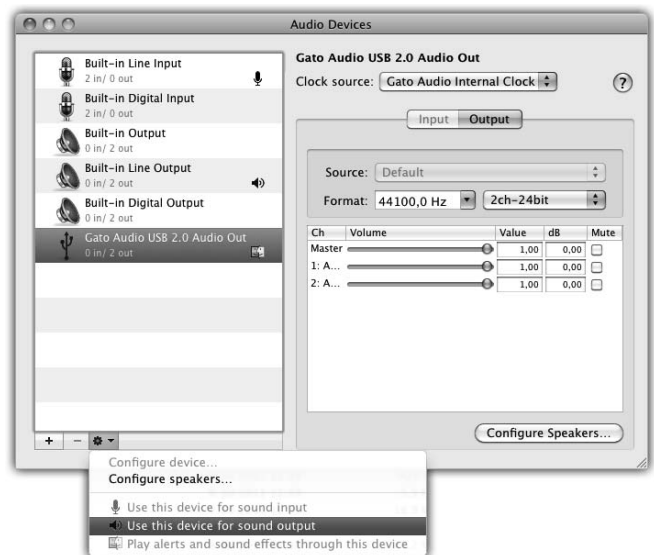

USB audio troubleshooting

USB audio devices have stronger requirements for both USB hardware and software than other USB devices. The following section describes the most common issues that may rise and their possible solutions.

Known hardware issues and possible solutions

A faulty hardware component, e.g. USB cable or USB port, may not have an impact on standard USB devices such as a FLASH drive or a printer but can be catastrophic for a USB audio device.

- **USB cables**

Quite often, the USB cable (or its connectors) is the cause for USB signal distortions. Some cables available in the market are not suited for USB 2.0 high-speed communication (480 Mbps). Also the maximum allowed cable length of 5 meters should not be exceeded. Try using a different cable. Try a shorter cable (less than 2 meters). Stay away from special USB cable offerings optimized for audio, or cables which include additional functionality such as status LEDs.

- **PCB mounted USB ports**

On some PC main boards (or laptops) signal quality of some USB ports is insufficient for USB audio streaming. The cause could be that on the PCB USB signals are routed close to a switching voltage regulator, for example. Try using a different USB port to connect the audio device.

- **USB hubs and front panel mounted USB ports**

External USB hubs and ports (mounted on a front panel or elsewhere in the PC case) are a possible source of USB signal distortion. Quality of cables or connectors used to connect the external USB port with the main board could be insufficient, or internal cables are placed close to the power supply or other sources of electrical noise. Try using a USB port that is mounted directly on the main board of the PC.

Known software issues and possible solutions

Due to the real-time nature of USB audio streams there are also requirements for the operating system and third party software components installed on the system. Software components that make real-time behavior of the operating system worse are not compatible with audio streaming applications in general.

- **Conflicting drivers**

Generally it can be stated that the set of device drivers that ships with Windows behaves well. If problems occur then they are typically caused by third party drivers that are to be installed for hardware which Windows does not support by default. So if a hardware component is supported by an in-box driver then this driver is to be preferred and a third party driver should not be installed.

- **W-LAN or Ethernet device drivers**

Quite often it can be observed that device drivers for W-LAN adapters monopolize the computers CPU causing clicks and drop outs when streaming audio to USB. A few Ethernet drivers also have such issues. Try to find an updated W-LAN driver, or try an older version of the driver. If no suited driver can be found, disable W-LAN (or Ethernet) while audio streaming is running.

- **Virus scanners or personal firewall software**

Normally, this kind of software includes some components to perform filtering or scanning work in the computers CPU. Often, such components keep the CPU busy for long periods which can cause clicks and drop outs when streaming audio to USB. Try to pause or disable the software while streaming audio to USB. Try uninstall the software and use a different product with similar functionality.

Make it last!

Please apply simple common sense to maintain the sound quality and lifespan of your new Gato Audio amplifier. Here are a few guidelines:

- Regular care: wipe the surfaces carefully by using a clean soft dry cloth
- Cleaning: if necessary, wipe the hard surfaces clean using a soft cloth dampened only with clean water.
- Grease stains or finger marks can be removed carefully with a clean soft cloth lightly dampened in a mix of clean lukewarm water and a single drop of dish-washing liquid. Then wipe the surfaces dry using a soft dry cloth
- Be careful never to use hot water or any type of concentrated detergent, solvent, thinner, or any other volatile substance on the surfaces, or you may cause permanent damage to the surface coating
- Keep the cabinet away from prolonged contact with rubber or PVC materials
- Do not expose the amplifier to direct sunlight or other heat sources

If all else fails...

...don't panic! Every Gato Audio product comes with a minimum 2-year warranty. See our website for details.

This warranty does not cover damage or wear directly or indirectly caused by improper use, violence, tampering with or unauthorized access to or servicing of any part of the product.

If you are in need of service or repair, please do not hesitate to contact us at hello@gato-audio.com or visit our website www.gato-audio.com for more information.



Technical specifications

Output power	2x 250 W / 8 Ω - 2x 500 W / 4 Ω
Frequency response	20 Hz-20 kHz - 0.5 dB, and 2 Hz-70 kHz - 3 dB
Total Harmonic Distortion	< 0,01% at rated power
Signal to noise ratio	> 110 dB
Line out maximum level	13 V balanced, 6,5 V unbalanced
Total Harmonic Distortion	< 0,001 % pre out
Input impedance	20 k Ω RCA or 40 k Ω Balanced
Line output impedance	75 Ω
Voltage gain	26 dB (+10 db headroom)
Recommended speaker load	4 Ω -16 Ω

Connectors

Balanced analogue inputs	1 pair gold plated XLR Neutrik
Unbalanced analogue inputs	2 pairs of gold plated RCA stereo
Digital inputs	1 USB type B, 1 Toslink, 1 RCA coaxial, 1 Bluetooth, (1 Wi-Fi, 1 Ethernet)
Balanced analogue outputs	1 pair gold plated XLR Neutrik
Unbalanced analogue outputs	1 pair of gold plated RCA Stereo
Speaker output	2 pairs of gold plated safety banana
Trigger, 12 V	1 mini jack

Size & Power

Power Requirements	115 VAC or 230 VAC, 50 Hz/60 Hz, 1000W max
Fuse	20 mm sand-filled, 6.3 AT
Power consumption stdb/idle/max	< 1W/23W/1000W
Dimensions (WxHxD)	325 x 105 x 420 mm / 12.8 x 4.1 x 16.5"
Weight	10 kg / 22 lb



Gato Audio
Marielundvej 28
DK-2730 Herlev
Denmark

Phone: +45 5042 1900
www.gato-audio.com
hello@gato-audio.com